

CODE 122M : Gravillon 10/16 MOUEN


Producteur : GKM - Carrières de Mouen
Petrographie : Grés
Elaboration : Tertiaire
Usage : Routier

Partie contractuelle
Valeurs spécifiées sur lesquelles le producteur s'engage

Classe granulaire	Norme											CODE	
	10	16	Norme NF P 18-545 Article 10										
	d/2	d	D	1.4D									
	5	10	16	22.4	31.5	f	FI	AS	C	LA	MBF	S	WA24
Incertitude U	1	5	5	1	0	0.3	4	0.15	0.003	3	2	0.1	0.5
V.S.S.+U	6.0	20.0	100.0	100.0	100.0	4.30	24.00	0.350	0.013	28	12.00	0.500	3.0
V.S.S.	5.0	15.0	99.0	100.0	100.0	4.00	20.00	0.200	0.010	25	10.00	0.400	2.5
V.S.I.	0.0	0.0	84.0	98.0	100.0	0.00							
V.S.I.-U	0.0	0.0	79.0	97.0	100.0	0.00							
Ecart-type max	1.52	4.55	4.55										

Partie informative
Résultats de production

	du 06/07/20 au 14/12/20							au 31/07/20					
	5	10	16	22.4	31.5	f	FI	AS	C	LA	MBF	S	WA24
Maximum	2.2	9.4	98.8	100.0	100.0	1.18	9.10						
Xf+1.25xEcart-types	1.7	7.5	98.5	100.0	100.0	0.89							
Moyenne Xf	1.0	5.1	95.3	100.0	100.0	0.54	7.39	0.023	0.001	14	3.33	0.007	0.6
Xf-1.25xEcart-types	0.2	2.7	92.2	100.0	100.0	0.18							
Minimum	0.2	2.1	87.3	100.0	100.0	0.16	6.09						
Ecart-type	0.58	1.90	2.53	0.00	0.00	0.284	0.944						
Nombre de résultats	21	21	21	21	21	21	6	1	1	1	1	1	1

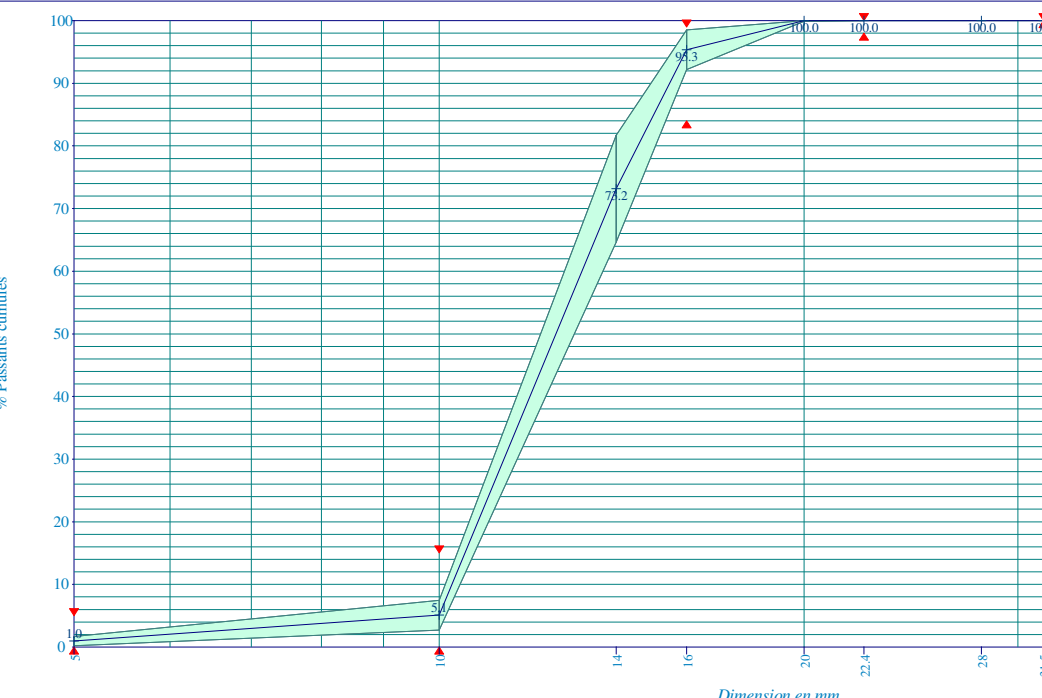

Autres caractéristiques	
Sensibilité au gel/dégel	Non gélif (31/07/2020)
Masse volumique réelle	2.65 (31/07/2020)
Impureté prohibé	Néant (31/07/2020) <0.1
Teneur en alcalins actifs	0.0061 (31/07/2020)
Alcali-réaction	NR (31/07/2020)

Jérémy LEBARBHEY - Nicolas GOSSELIN